

ALLURE LOCKING is the perfect solution if you are looking for 100% water proof and termite free flooring. This is the latest in a long line of innovative flooring products from VERTEX that has been equipped with patented CLICK system for simple and glue-less installation. This unique feature of interlocking panels, has a perfect waterproof connection between the planks that virtually leaves no room for the water to seep through, and it can cope with the most extreme humidity.

ALLURE LOCKING is made from top quality virgin resins and, because it is not constructed from wood, the floor does not swell or deform under the influence of water. Also, termites will not attack the resin material. Due to its waterproof properties, this revolutionary product makes a perfect choice for many applications and it works in most non-excessively wet areas such as restaurants, kitchens, laundries etc.

It is supplied in large planks (size: 190mm x 1210mm) and comes in a wide range of natural wood colours to suits your design requirement. Wood design makes on

Allure Locking uses CERAMIC BEAD TECHNOLOGY in the coatings for additional wear resistance and durability.

The features and benefits of Allure Locking include:

- Lifetime warranty for residential, up to 10 years warranty for commercial - Value buy high quality flooring
- Do-It-Yourself (DIY) concept flooring.
- You can use it immediately after installation
- 100% guarantee against chip or crack*
- Suitable for most subfloor surfaces and conditions
- Underlay not required
- Requires no expansion joints
- Easy to cut with a utility knife hence no heavy tools required for installation
- No messy installation because adhesives or glue are not required
- No skirting required
- Minimal wastage on installation
- Slip resistance
- Fire resistance

Allure Locking

- Very low formaldehyde emission – E1 category
- Easy to maintain
- Resistant to scratches and household chemicals
- Comfortable and quiet under foot
- It has been enhanced with fiberglass for stability and durability to prevent the resilient flooring from warping and buckling


Other features for allure locking included



Product specification as follow

Plank Dimension	5mm x 190mm X 1210mm
Thickness	5mm
Wear Layer Thickness	0.5mm (Bevelled), 0.3mm (Non Bevelled)
Coating	Ceramic Bead Technology
Embossing	In-Registered Emboss, Hand Scrap, Barnside, Tick
Warranty	Lifetime for residential, 5 years for commercial
Case Packaging	8 Pcs per case
Pallet Packing	32 packs per pallet
Sqft / m ² per case	19.8 sqft per case / 1.8292 m ² per case
Sqft / m ² per plank	2.5 sqft per plank / 0.23m ² per plank
Net weight per case	18.8 Kg per case
Gross weight per case	19.50 Kg per case

The picture below depicted the construction layers for allure locking

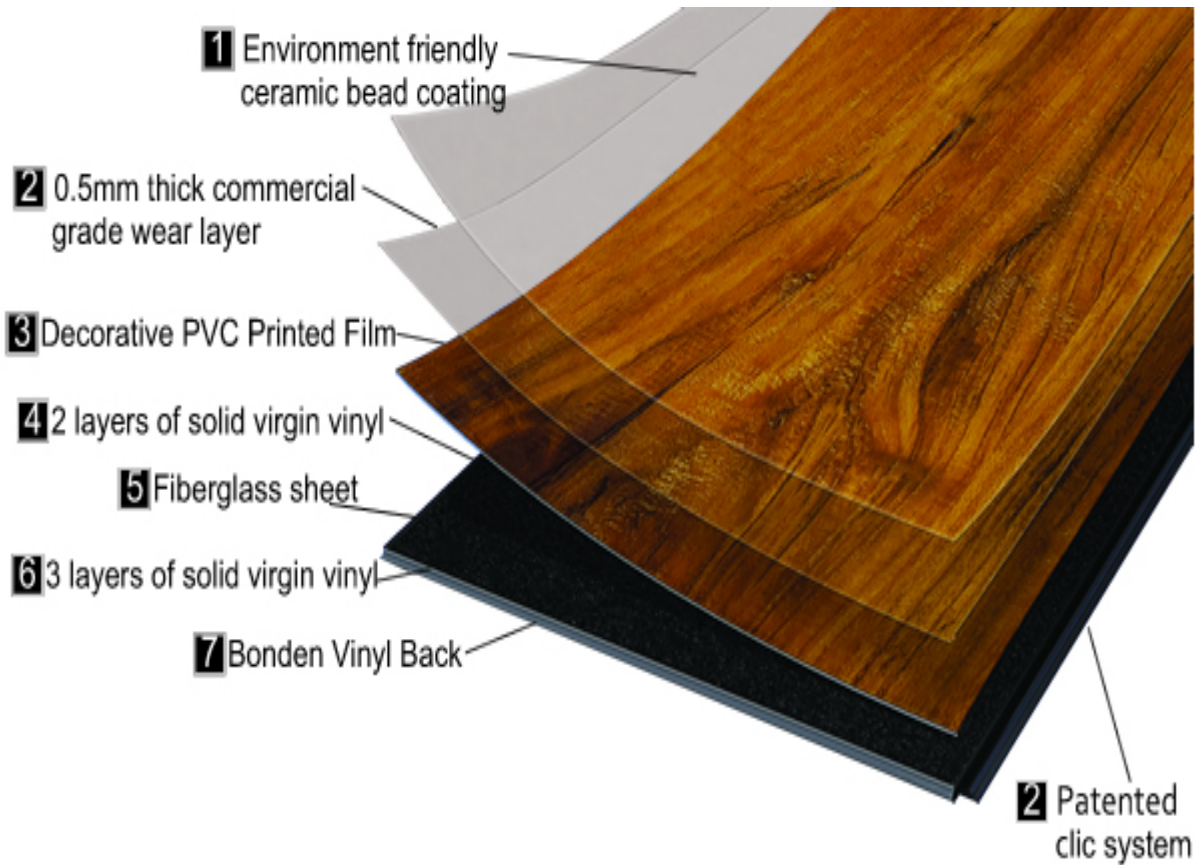

at ALLURE LOCKING. Our vinyl flooring is made from the best materials and is designed to be a beautiful addition to your home.



1 Position the 2 planks



2 Angle the second plank and align the interlocking strips



3 Press down and lock into place

at ALLURE LOCKING. Our vinyl flooring is made from the best materials and is designed to be a beautiful addition to your home. We are pleased to present you the best for ALLURE LOCKING.